



UNITED STATES DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
NATIONAL MARINE FISHERIES SERVICE
NORTHEAST REGION
One Blackburn Drive
Gloucester, MA 01930-2298

July 21, 2005

Dear Commercial Lobster Trap/Pot and Gillnet Fishermen:

This letter is to inform you that the National Marine Fisheries Service (NOAA Fisheries Service) has established a DAM zone with required gear modifications for lobster trap/pot and anchored gillnet fishing gear. The required gear modifications for lobster trap/pot and anchored gillnet gear will be effective for 15 days, in an area southeast of Chatham, Massachusetts, totaling approximately 2,980 square nautical miles (nm^2) in July, and 3,120 square nautical miles (nm^2) in August. In addition, NOAA Fisheries Service requires that no additional gear be set in the DAM zone during the restricted period unless that gear has been modified accordingly. This action is being taken to respond to reported aggregations of endangered Northern right whales (right whales).

The regulations implementing the Atlantic Large Whale Take Reduction Plan (ALWTRP) provide NOAA Fisheries Service the authority to temporarily restrict the use of lobster trap/pot and anchored gillnet fishing gear on an expedited basis to protect right whales through its Dynamic Area Management (DAM) program.

A DAM zone is triggered by a single reliable report from a qualified individual of three or more right whales within an area (75 nm^2) such that right whale density is equal to or greater than 0.04 right whales per nm^2 . On July 12, 2005, NOAA Fisheries Service received a report of 31 right whales in two areas. A group of 28 right whales were reported in the proximity $41^\circ 15.3'$ N. lat. and $68^\circ 58.4'$ W. long. Another group of three right whales were reported in the proximity of $41^\circ 45.2'$ N. lat. and $68^\circ 34.4'$ W. long. These positions lie southeast of Chatham, MA in an area known as the Great South Channel. NOAA Fisheries Service determined that these sightings were reliable reports submitted by qualified individuals that meet the DAM zone trigger.

Therefore, NOAA Fisheries Service is announcing required gear modifications for the DAM zone. **Effective 0001 hours July 28, 2005, through 2400 hours August 11, 2005, anchored gillnet and lobster trap/pot gear in the DAM zone must comply with the required gear modifications. The required gear modifications and the coordinates for the DAM zone are found in the enclosure to this letter. Special note for gillnet fisherman: During July and August, a portion of this DAM zone overlaps the Northeast multispecies Closed Area 1 found at 50 CFR 648.80(a). Due to this closure, sink gillnet gear is prohibited from this portion of the DAM zone.**

To obtain the DAM regulations in their entirety, please call 978-281-9300 x6505. In addition, these regulations are available by accessing the ALWTRP web page (<http://www.nero.nmfs.gov/whaletrp/>). If you have any questions regarding these regulations, please call 978-281-9300 x6505.


Sincerely,

Patricia A. Kurkul
Regional Administrator

Enclosure




July DAM Zone from July 12, 2005
sighting of 31 Northern Right Whales
southeast of Chatham, MA

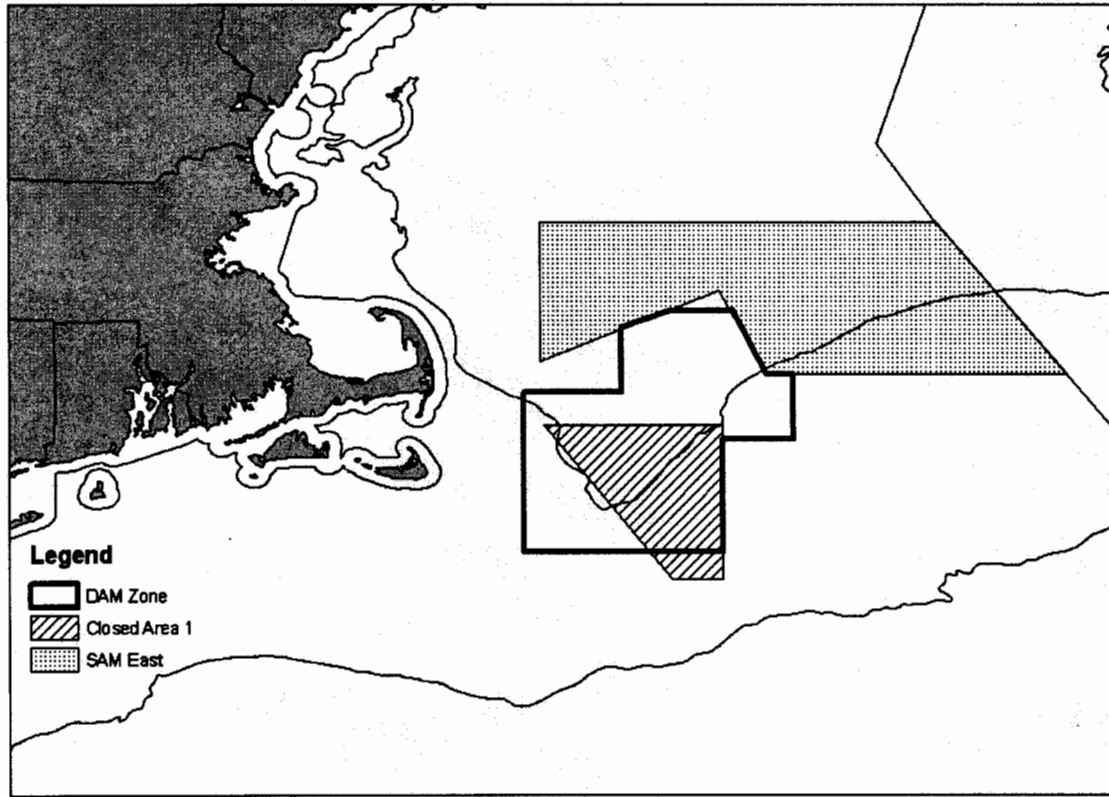

Coordinates for the DAM Zone effective from 0001 hours July 28, 2005, through 2400 hours July 31, 2005, are as follows:

41°40'N, 69°29'W (NW Corner)
41°40'N, 69°00'W
41°59'N, 69°00'W
42°04'N, 68°46'W
42°04'N, 68°27'W
41°45'N, 68°17'W
41°45'N, 68°09'W
41°26'N, 68°09'W
41°26'N, 68°30'W
40°53'N, 68°30'W
40°53'N, 69°29'W

August DAM Zone from July 12, 2005
sighting of 31 Northern Right Whales
southeast of Chatham, MA

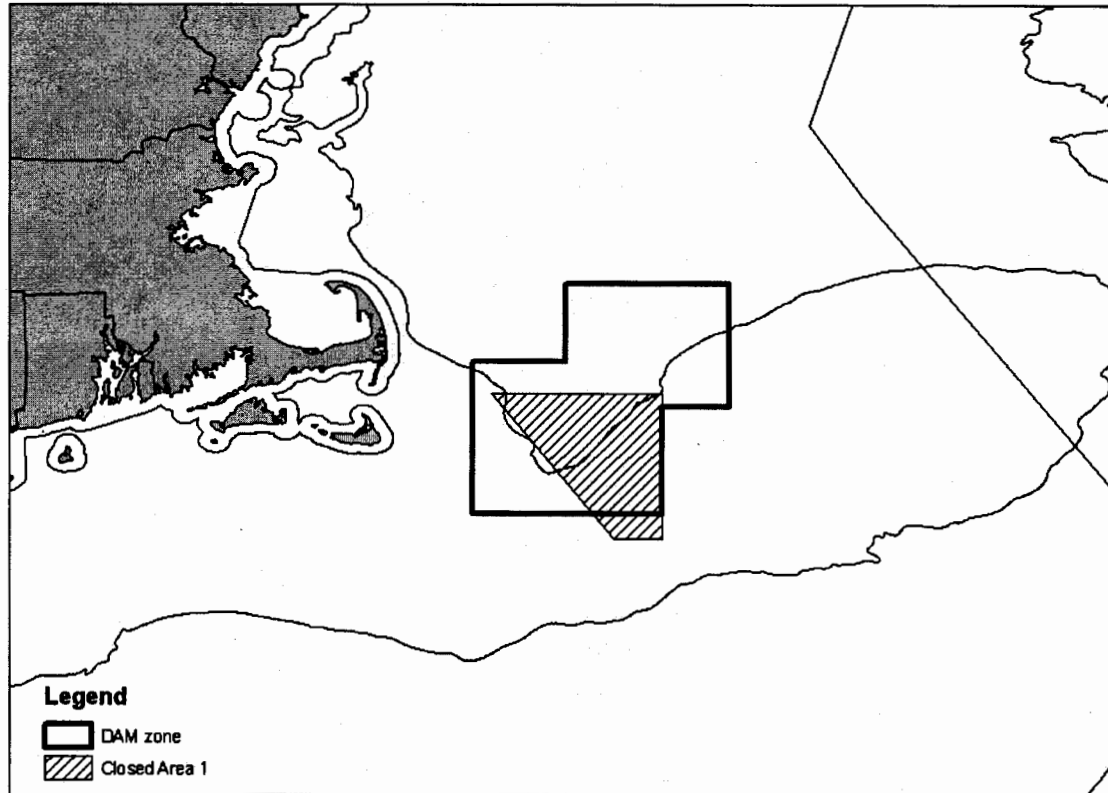

Coordinates for the DAM Zone effective from 0001 hours August 1, 2005, through 2400 hours August 11, 2005, are as follows:

41°40'N, 69°29'W (NW Corner)
41°40'N, 69°00'W
42°04'N, 69°00'W
42°04'N, 68°09'W
41°26'N, 68°09'W
41°26'N, 68°30'W
40°53'N, 68°30'W
40°53'N, 69°29'W

DAM Program Gear Requirements

In addition to those gear modifications currently implemented under the ALWTRP at 50 CFR 229.32, the following gear modifications are required in the DAM zone. If the requirements and exceptions for gear modification in the DAM zone, as described below, differ from other ALWTRP requirements for any overlapping areas and times, then the more restrictive requirements will apply in the DAM zone. Please note that the below provides a summary of the DAM Program gear requirements and is not a substitute for the ALWTRP regulations.

Lobster Trap/Pot Gear

Fishermen utilizing lobster trap/pot gear within the portion of the Northern Nearshore Lobster Waters that overlap with the DAM zone are required to utilize all of the following gear modifications while the DAM zone is in effect:

1. Groundlines must be made of either sinking or neutrally buoyant line. Floating groundlines are prohibited;
2. All buoy lines must be made of either sinking or neutrally buoyant line, except the bottom portion of the line, which may be a section of floating line not to exceed one-third the overall length of the buoy line;
3. Fishermen are allowed to use two buoy lines per trawl; and
4. A weak link with a maximum breaking strength of 600 lb (272.4 kg) must be placed at all buoys.

Fishermen utilizing lobster trap/pot gear within the portion of the Great South Channel Restricted Lobster Area and Offshore Lobster Waters that overlap with the DAM zone are required to utilize all of the following gear modifications while the DAM zone is in effect:

1. Groundlines must be made of either sinking or neutrally buoyant line. Floating groundlines are prohibited;
2. All buoy lines must be made of either sinking or neutrally buoyant line, except the bottom portion of the line, which may be a section of floating line not to exceed one-third the overall length of the buoy line;
3. Fishermen are allowed to use two buoy lines per trawl; and
4. A weak link with a maximum breaking strength of 1,500 lb (680.4 kg) must be placed at all buoys.

Anchored Gillnet Gear

Fishermen utilizing anchored gillnet gear within the portions of the Great South Channel Restricted Gillnet Area, Great South Channel Sliver Restricted Area, and Other Northeast Gillnet Waters that overlap with the DAM zone are required to utilize all the following gear modifications while the DAM zone is in effect:

1. Groundlines must be made of either sinking or neutrally buoyant line. Floating groundlines are prohibited;
2. All buoy lines must be made of either sinking or neutrally buoyant line, except the bottom portion of the line, which may be a section of floating line not to exceed one-third the overall length of the buoy line;
3. Fishermen are allowed to use two buoy lines per string;
4. Each net panel must have a total of five weak links with a maximum breaking strength of 1,100 lb (498.8 kg). Net panels are typically 50 fathoms (91.4 m) in length, but the weak link requirements would apply to all variations in panel size. These weak links must include three floatline weak links. The placement of the weak links on the floatline must be: one at the center of the net panel and one each as close as possible to each of the bridle ends of the net panel. The remaining two weak links must be placed in the center of each of the up and down lines at the panel ends;
5. A weak link with a maximum breaking strength of 1,100 lb (498.8 kg) must be placed at all buoys; and
6. All anchored gillnets, regardless of the number of net panels, must be securely anchored with the holding power of at least a 22 lb (10.0 kg) Danforth-style anchor at each end of the net string.